




## INTERNATIONAL APPLIANCE FLEX STEEL CONDUIT

(UL RECOGNIZED. COMPONENT GRADE. TYPE AFS)

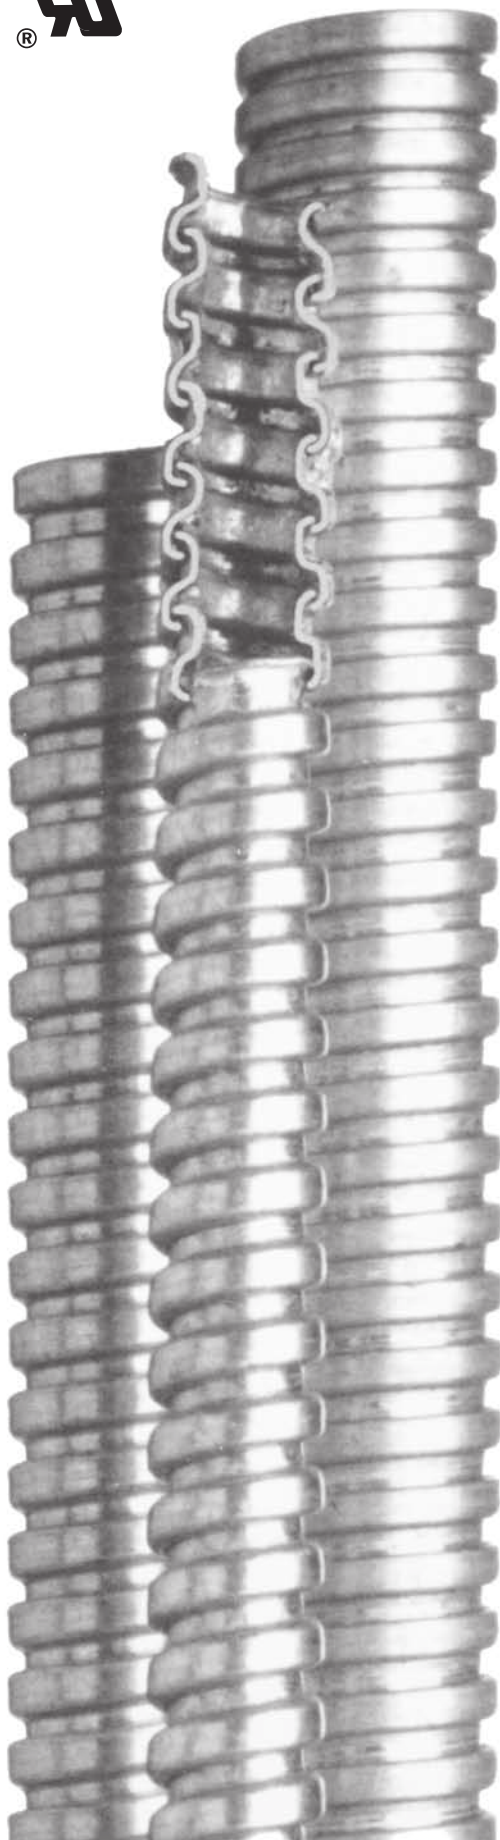

### FEATURES:

- Extra flexible steel construction
- Premium hot dip galvanized zinc coating won't flake or peel
- Superior corrosion resistance
- Smooth interior for easy wire pull-thru
- Built-in flexibility for simplified positioning
- Available in custom lengths
- RoHS WEEE compliant
- Exceptional flexibility for tight "U" bends
- For interconnecting within equipment and appliances
- UL recognized, File number E46112
- The acceptability of this product in an end product is determined by UL and CSA

### USES:

International Appliance Flex Steel Conduit is for use as wire harness within or for interconnecting parts of an appliance, office furniture and similar applications.

### SPECIFICATIONS:

Trade Size And Catalog Number	Acceptable Internal Diameter		Acceptable External Diameter		Bending Radius in Inches	Approx. Weight of 100 Ft.	Approx. Feet Per Standard Coil
	Min.	Max.	Min.	Max.			
AFS-5/16	0.297	0.327	0.450	0.480	1	9	250
AFS-3/8	0.360	0.390	0.530	0.560	3/4	13.2	250
AFS-7/16	0.422	0.452	0.575	0.605	13/16	14.4	250
AFS-1/2	0.485	0.515	0.640	0.670	1-1/4	18.2	250
AFS-9/16	0.547	0.575	0.705	0.735	1-1/2	19.5	250
AFS-5/8	0.610	0.640	0.765	0.795	1-5/8	20	250
AFS-3/4	0.735	0.765	0.895	0.925	1-3/4	22	250

\*Standard length tolerance on packaging +/- 2%

AFS



**INTERNATIONAL**  
METAL HOSE COMPANY

QUALITY MATERIALS • QUALITY MANUFACTURING  
QUALITY PERFORMANCE

520 Goodrich Road – Bellevue, OH 44811-0149 – Phone: 419.483.7690  
Fax: 419.483.8225 – Toll Free: 800.458.6855 – www.metalhose.com