




# INTERNATIONAL SEALSKIN™ LIQUID-TIGHT FLEXIBLE METALLIC CONDUIT

(CSA CERTIFIED. GALVANIZED STEEL CORE. TYPE CSALT)

CSALT

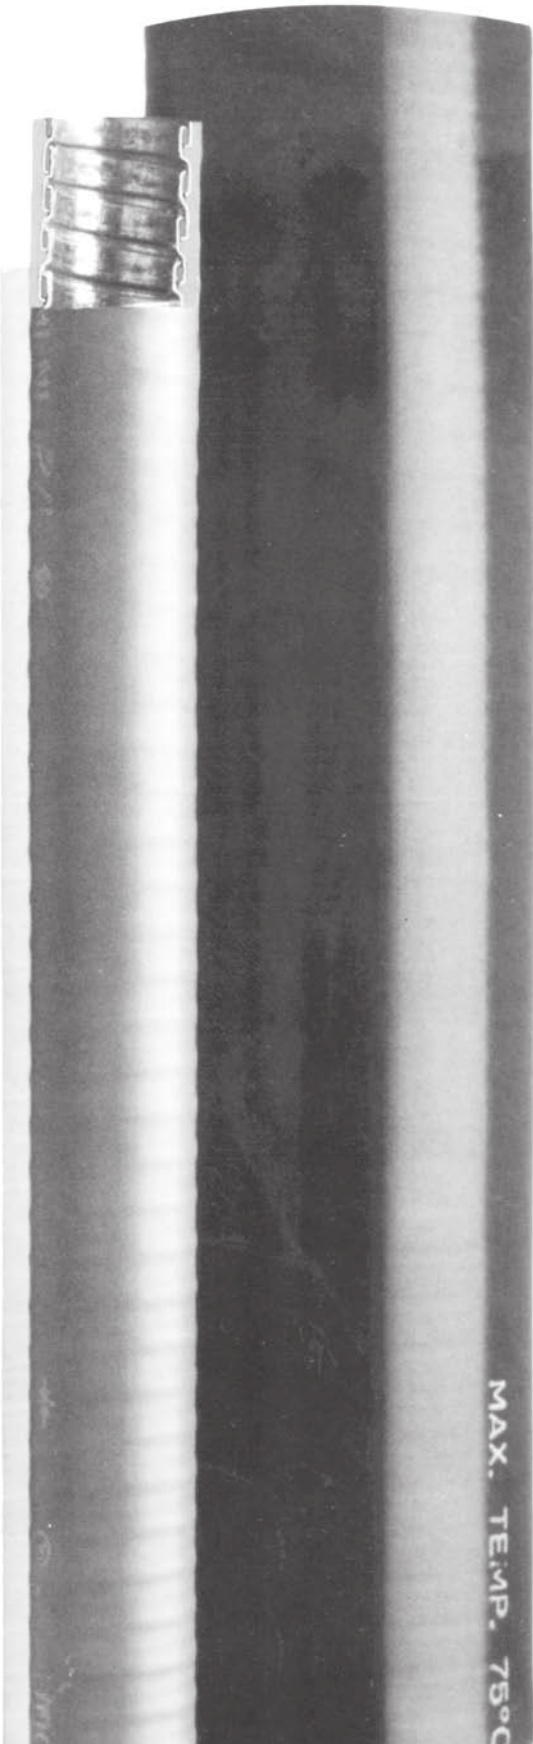

## FEATURES:

- Virgin polyvinyl chloride compound jacket
- Rated for: -20° C to +75° C (-5° F to +167° F)
- Exceptional crush proof qualities
- Smooth interior for easy wire pull-thru
- Complete protection against most liquids and moisture vapor
- Resists sunlight, heat, oil and chemical degradation
- RoHS WEEE compliant
- Squarelock construction with heavy cord packing
- Listed connectors available from leading manufacturers
- Superior protection for circuits located in hostile environments
- Complies with CSA C22.2 File number LL21229-4
- Flame test rating of FT-4 per CSA, C22.2
- For use in hazardous environment for both Class II and Class III locations

## USES:

International Sealskin™ CSA Certified Flexible Metallic Conduit provides protection for wiring circuits located in extremely wet or damp areas. It is also suitable for machines, tools, and equipment where ruggedness is required. Now in extensive use on presses, welders, pumps, blowers, grinders, conveyors, machines and portable tools, automated lines, and in construction, industry, commerce and transportation.

## SPECIFICATIONS:

Trade Size And Catalog Number	Acceptable Internal Diameter		Acceptable External Diameter		Bending Radius in Inches	Approx. Kilos per 10 mtrs.	Approx. Mtrs. Per Standard Pkg.
	Min.	Max.	Min.	Max.			
CSALT-3/8*	0.484	0.504	0.690	0.710	2	3.6	30
CSALT-1/2*	0.622	0.642	0.820	0.840	2-1/2	4.0	30
CSALT-3/4*	0.820	0.840	1.030	1.050	3-1/2	5.5	30
CSALT-1*	1.041	1.066	1.290	1.315	6-1/2	8.5	30
CSALT-1-1/4*	1.380	1.410	1.630	1.660	8	11.6	15
CSALT-1-1/2*	1.575	1.600	1.865	1.900	9	12.3	15
CSALT-2*	2.020	2.045	2.340	2.375	11	20.8	15
CSALT-2-1/2	2.480	2.505	2.840	2.875	14	27.5	15
CSALT-3	3.070	3.100	3.460	3.500	17-1/2	35.7	8
CSALT-3-1/2	3.500	3.540	3.960	4.000	20	48.4	8
CSALT-4	4.000	4.040	4.460	4.500	24	64.0	8

\*Also available on reels. Available in black. Other colors available upon request.  
Standard length tolerance on packaging +/- 2%



**INTERNATIONAL**  
METAL HOSE COMPANY

QUALITY MATERIALS • QUALITY MANUFACTURING  
QUALITY PERFORMANCE

520 Goodrich Road – Bellevue, OH 44811-0149 – Phone: 419.483.7690  
Fax: 419.483.8225 – Toll Free: 800.458.6855 – www.metalhose.com