


INTERNATIONAL FLEXIBLE STEEL CONDUIT

(NON-UL. EXPORT GRADE. TYPE IC)

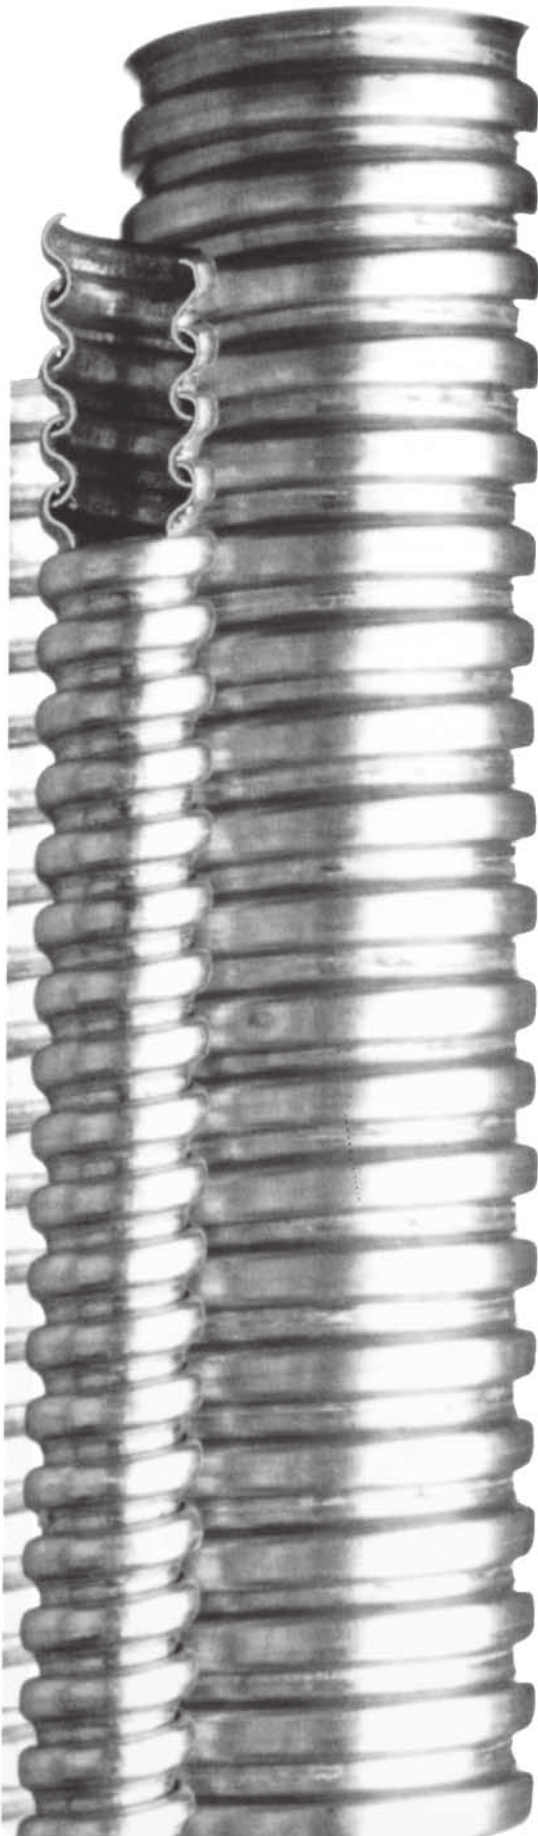

FEATURES:

- Steel construction
- Hot dip galvanized zinc coating won't flake or peel
- Corrosion resistant
- Smooth interior for easy wire pull-thru
- Lightweight for easier handling
- RoHS WEEE compliant
- Easy installation to follow contours
- Built-in flexibility for simplified positioning
- Crush resistant
- Standard connectors available from leading manufacturers
- +400° F Maximum temperature

USES:

International Flexible Steel Conduit can be used for an electrical raceway where listed products are not required.

SPECIFICATIONS:

Trade Size And Catalog Number	Acceptable Internal Diameter	Acceptable External Diameter	Bending Radius in Inches	Approx. Weight of 100 Ft.	Approx. Feet Per Standard Coil
IC-3/8	0.375	0.610	2	12	100 or 250
IC-1/2	0.625	0.920	3	23.7	100
IC-3/4	0.812	1.105	4	24.5	100
IC-1	1.000	1.380	5	34	50
IC-1-1/4	1.250	1.630	6-1/4	40	50
IC-1-1/2	1.500	1.950	7-1/2	48	25
IC-2	2.000	2.450	10	72	25
IC-2-1/2	2.500	3.060	12-1/2	112	25
IC-3	3.000	3.560	15	140	25
IC-3-1/2	3.500	4.060	17-1/2	156	25
IC-4	4.000	4.560	20	210	25

Special packaging available on certain sizes - contact factory for specifics
1" through 4" - Available on reels - consult factory.
Standard length tolerance on packaging +/- 2%



INTERNATIONAL
METAL HOSE COMPANY

QUALITY MATERIALS • QUALITY MANUFACTURING
QUALITY PERFORMANCE

520 Goodrich Road – Bellevue, OH 44811-0149 – Phone: 419.483.7690
Fax: 419.483.8225 – Toll Free: 800.458.6855 – www.metalhose.com