


INTERNATIONAL SUPER FLEX STEEL SQUARELOCK CONDUIT

(NON-UL. CONTRACTOR GRADE. TYPE SF)

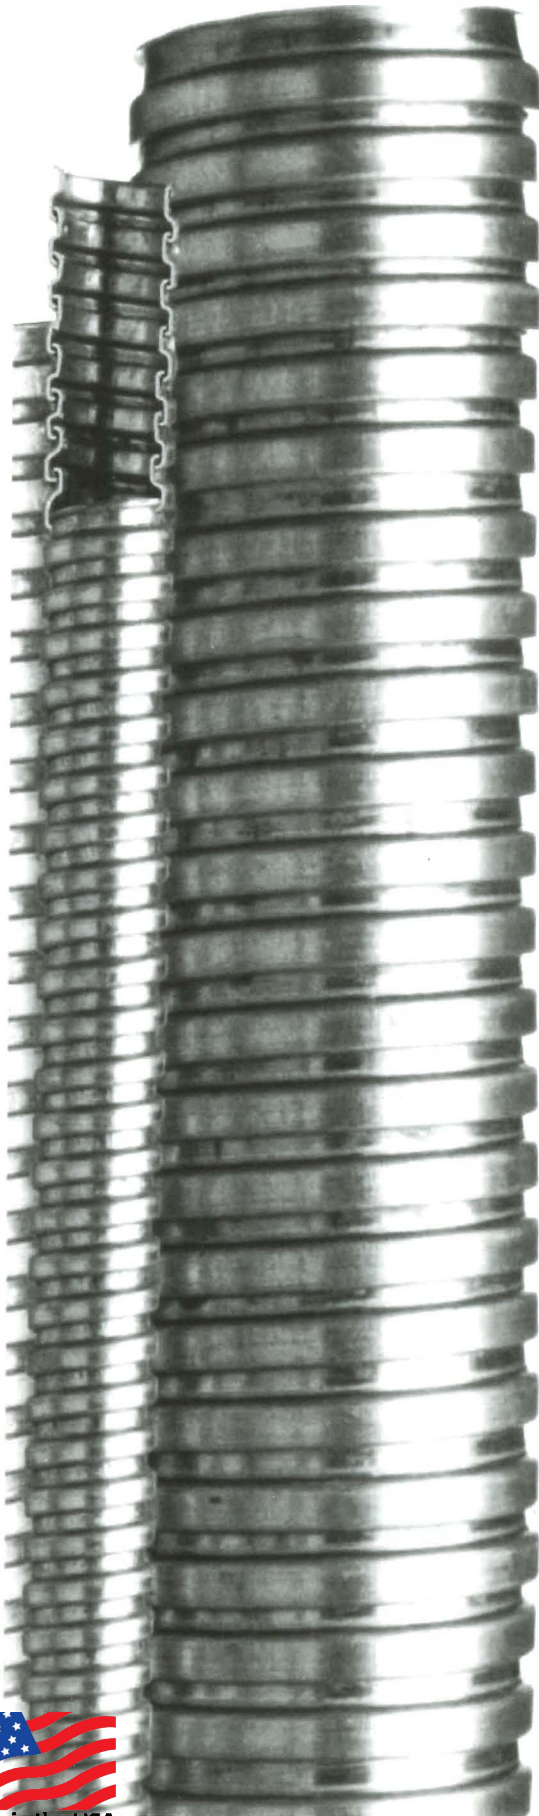

FEATURES:

- Extra flexible squarelock construction
- Hot dip galvanized steel
- Superior corrosion resistance
- Smooth interior for easy wire pull-thru
- Flexibility in an economic design
- Exceptional flexibility for tight "U" bends
- RoHS WEEE compliant
- Easily cut to length on the job
- Superior finish dresses up all installations
- Squarelock construction for maximum ease of use
- Available in cut lengths
- +400° F Maximum temperature

USES:

International Super Flex Steel Squarelock Conduit is used for electrical wiring where listed products are not required. It can also be used as a protective cover in corrosive environments for hydraulic lines, brake lines, power steering assemblies, etc.

SPECIFICATIONS:

MADE IN USA

Trade Size And Catalog Number	Acceptable Internal Diameter		Acceptable External Diameter		Bending Radius in Inches	Approx. Weight of 100 Ft.	Feet Per Standard Coil
	Min.	Max.	Min.	Max.			
SF-3/16	0.187	0.207	0.290	0.320	1	3	250
SF-1/4	0.250	0.270	0.350	0.380	1-1/4	6	250
SF-5/16	0.312	0.332	0.437	0.467	1-1/2	7	250
SF-3/8	0.375	0.395	0.500	0.530	1-3/4	9	250
SF-7/16	0.437	0.457	0.557	0.587	1-7/8	10	250
SF-1/2	0.500	0.520	0.625	0.655	2	16	250
SF-5/8	0.625	0.645	0.750	0.780	2-3/4	19	250
SF-3/4	0.750	0.770	0.940	0.970	3	21	50
SF-7/8	0.875	0.895	1.065	1.095	3-1/4	23	50
SF-1	1.000	1.020	1.190	1.250	3-1/2	32	50
SF-1-3/16	1.187	1.207	1.377	1.407	3-3/4	44	50
SF-1-1/4	1.250	1.270	1.440	1.470	4	47	50
SF-1-5/16	1.312	1.332	1.500	1.530	4-1/4	50	50
SF-1-1/2	1.500	1.520	1.750	1.780	4-1/2	64	50
SF-1-3/4	1.750	1.770	2.000	2.030	4-3/4	68	50
SF-2	2.000	2.220	2.250	2.280	5	74	50

Also available on reels, and special packaging - consult factory.
Standard length tolerance on packaging +/- 2%



INTERNATIONAL
METAL HOSE COMPANY

QUALITY MATERIALS • QUALITY MANUFACTURING
QUALITY PERFORMANCE

520 Goodrich Road – Bellevue, OH 44811-0149 – Phone: 419.483.7690
Fax: 419.483.8225 – Toll Free: 800.458.6855 – www.metalhose.com

