

INTERNATIONAL SEALSKIN™ UL LISTED LIQUID-TIGHT FLEXIBLE METALLIC CONDUIT (UL LISTED. CSA CERTIFIED. TYPE UALT)



FEATURES:

- Galvanized steel core for lasting mechanical protection
- Durable, abrasion resistant PVC jacket won't wrinkle or shrink from cut ends
- Exceptional crush proof qualities
- Smooth interior for easy wire pull-thru
- Complete protection against most liquids and moisture vapor
- Resists sunlight, heat, oil and chemical degradation; Rated: -20° C to +60° C (-5° F to +140° F)
- Accepts standard UL Listed liquid-tight connectors
- RoHS WEEE compliant

- The armor is approved as an equipment ground in sizes 3/8" through 1-1/4"
- Superior protection for circuits located in hostile environments
- Installs quickly and easily from handy payout carton
- Complies with UL standard 360, File number E34028, CSA C22.2 File number LL21229-4
- Copper bond wire in 3/8"- 1 1/4"
- Standard package is shrink-wrapped coils
- Approved for direct burial and in concrete


NEC Articles:

- Article 250.118 Equipment Grounding
- Article 350 Liquidtight Flexible Metal Conduit
- Article 501.10, Class I, Div Classes II and III
- Article 502.10, Class II, Div. 1 & 2
- Article 503.10, Class III, Div. 1&2
- Article 511.7, Above Class I Locations
- Article 620.21 Elevators, Escalators and Platform Lifts
- Article 645.5 Information Technology Equipment
- Article 680.42 Pools, Hot Tubs and Fountains
- Article 695.6 Electrical Fire Pump

USES:

International Sealskin™ UALT gives protection for wiring circuits located in extremely wet or damp areas. Also suitable for machines and equipment where ruggedness is required. Now in use on presses, welders, pumps, blowers, grinders, conveyors, automated lines, etc.

SPECIFICATIONS:

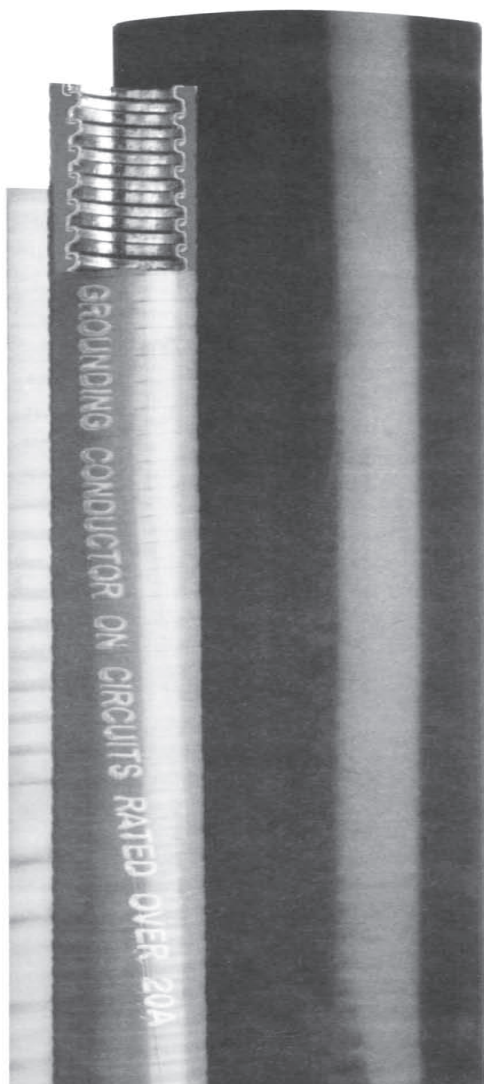

Trade Size And Catalog Number	Acceptable Internal Diameter		Acceptable External Diameter		Bending Radius in Inches	Approx. Weight of 100 Ft.	Approx. Standard Feet Per Pkg.
	Min.	Max.	Min.	Max.			
UALT-3/8*	0.484	0.504	0.690	0.710	2	27.5	100
UALT-1/2*	0.622	0.642	0.820	0.840	3-1/4	31	100
UALT-3/4*	0.820	0.840	1.030	1.050	4-1/4	39	100
UALT-1*	1.041	1.066	1.290	1.315	6-1/2	70.5	100
UALT-1-1/4*	1.380	1.410	1.630	1.660	8	94	50
UALT-1-1/2*	1.575	1.600	1.865	1.900	9	116	50
UALT-2*	2.020	2.045	2.340	2.375	11	156	50
UALT-2-1/2	2.480	2.505	2.840	2.875	14	188	50
UALT-3	3.070	3.100	3.460	3.500	17-1/2	300	25
UALT-3-1/2	3.500	3.540	3.960	4.000	20	400	25
UALT-4	4.000	4.040	4.460	4.500	24	448	25

**Also available on reels.
Available in black and other colors on request – consult factory.
Standard length tolerance on packaging +/- 2%



INTERNATIONAL
METAL HOSE COMPANY

**QUALITY MATERIALS • QUALITY MANUFACTURING
QUALITY PERFORMANCE**

520 Goodrich Road – Bellevue, OH 44811-0149 – Phone: 419.483.7690
Fax: 419.483.8225 – Toll Free: 800.458.6855 – www.metalhose.com